

Product Specifications

(23)

(ø 28.5) 🛶

-3/8"

SQUARE DR

N

CTBAW213

(38.7)

21 Nm RIGHT ANGLE 5.2 - 21 Nm (3.8 - 15.5 ft·lbs)

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **On-Tool Storage** Back-up on-tool data collection in the event of disrupted connection
- Cost Savings Connect up to 16 tools to 1 controller
- Flexible Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- Multi-Color LED Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- Stay Alive Function Prevents reboot during battery change, gaining time and efficiency
- Enhanced WiFi Range Up to 300 feet for a broad connection within your production facility
- Decreased Takt Times Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 5.2 - 21

TORQUE RANGE (ft·lb)

735


Min / Max: 3.8 - 15.5

SPEED

r/min:

WEIGHT & DIMENSIONS

Weight w/o Battery	1.4 kg / 3.1 lb
Length	515 mm / 20.28 in
Height	38.7 mm / 1.52 in
Side to Center	14.3mm / 0.56 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA
CE	

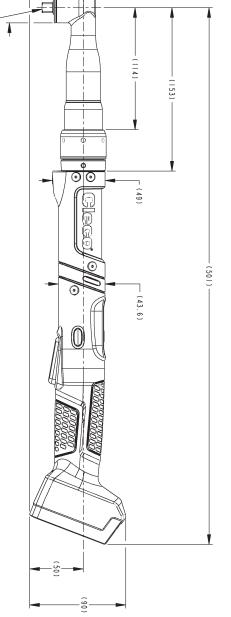

Apex Tool Group, LLC Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de

