


Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

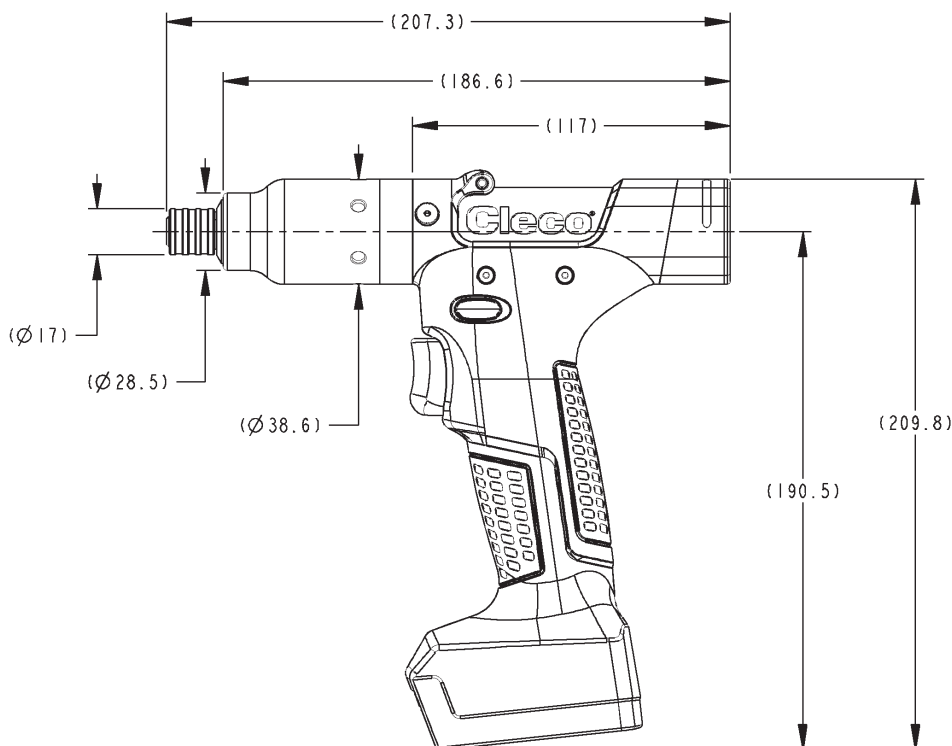

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 1.1 - 4.9

TORQUE RANGE (ft-lb)

Min / Max: 0.8 - 3.6

SPEED

r/min: 3525

WEIGHT & DIMENSIONS


Weight w/o Battery	0.90 kg / 2.0 lb
Length	191 mm / 7.52 in
Height	210 mm / 8.27 in
Side to Center	19.3 mm / 0.76 in
Output	1/4" Quick Change
Country of Origin:	Assembled in USA



Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

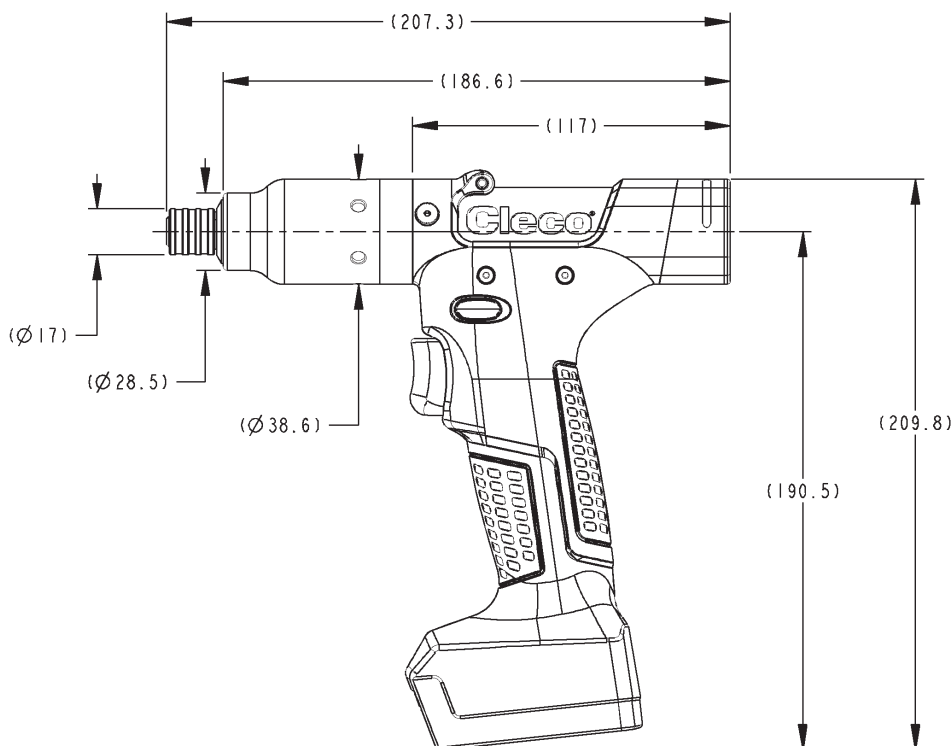

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 2.4 - 10

TORQUE RANGE (ft-lb)

Min / Max: 1.8 - 7.4

SPEED

r/min: 1600

WEIGHT & DIMENSIONS


Weight w/o Battery	0.95 kg / 2.1 lb
Length	207 mm / 8.15 in
Height	210 mm / 8.27 in
Side to Center	19.3 mm / 0.76 in
Output	1/4" Quick Change
Country of Origin:	Assembled in USA



Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

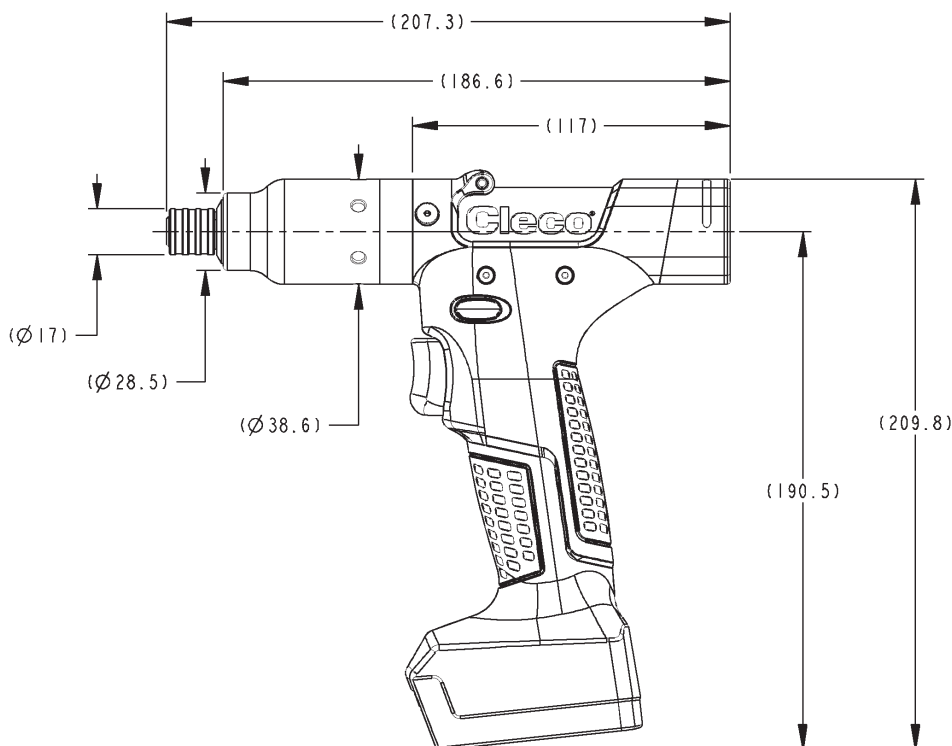

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 3.4 - 14.4

TORQUE RANGE (ft-lb)

Min / Max: 2.5 - 10.6

SPEED

r/min: 1125

WEIGHT & DIMENSIONS

Weight w/o Battery	0.95 kg / 2.1 lb
Length	207 mm / 8.15 in
Height	210 mm / 8.27 in
Side to Center	19.3 mm / 0.76 in
Output	1/4" Quick Change
Country of Origin:	Assembled in USA



Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 3.6 - 15

TORQUE RANGE (ft-lb)


Min / Max: 2.7 - 11.1

SPEED

r/min: 1025

WEIGHT & DIMENSIONS

Weight w/o Battery	1.4 kg / 3.1 lb
Length	515 mm / 20.28 in
Height	38.7 mm / 1.52 in
Side to Center	14.3 mm / 0.56 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA

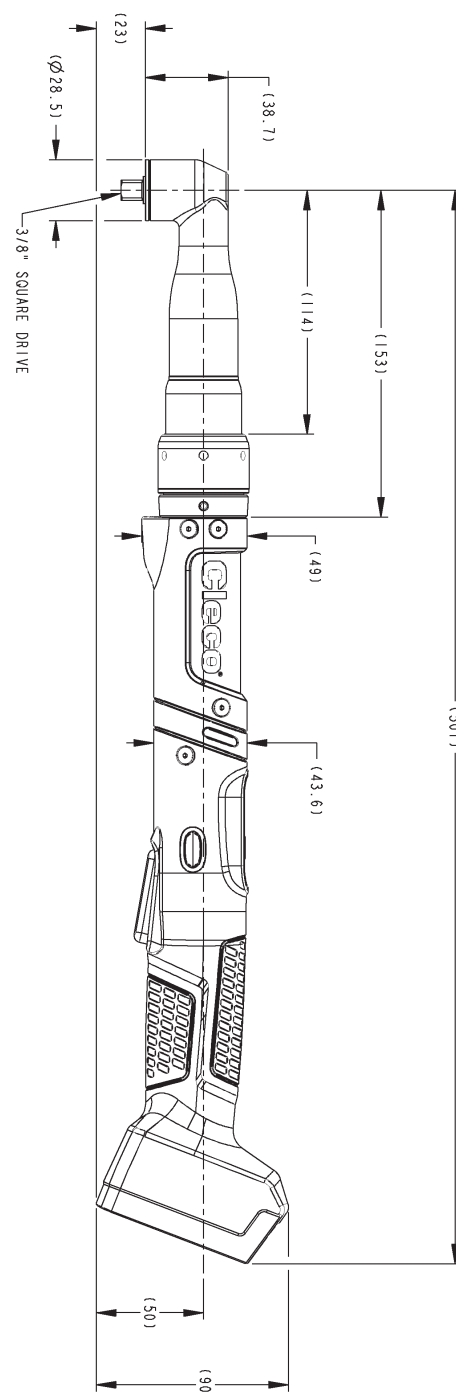

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 5.2 - 21

TORQUE RANGE (ft-lb)


Min / Max: 3.8 - 15.5

SPEED

r/min: 735

WEIGHT & DIMENSIONS

Weight w/o Battery	1.4 kg / 3.1 lb
Length	515 mm / 20.28 in
Height	38.7 mm / 1.52 in
Side to Center	14.3mm / 0.56 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA

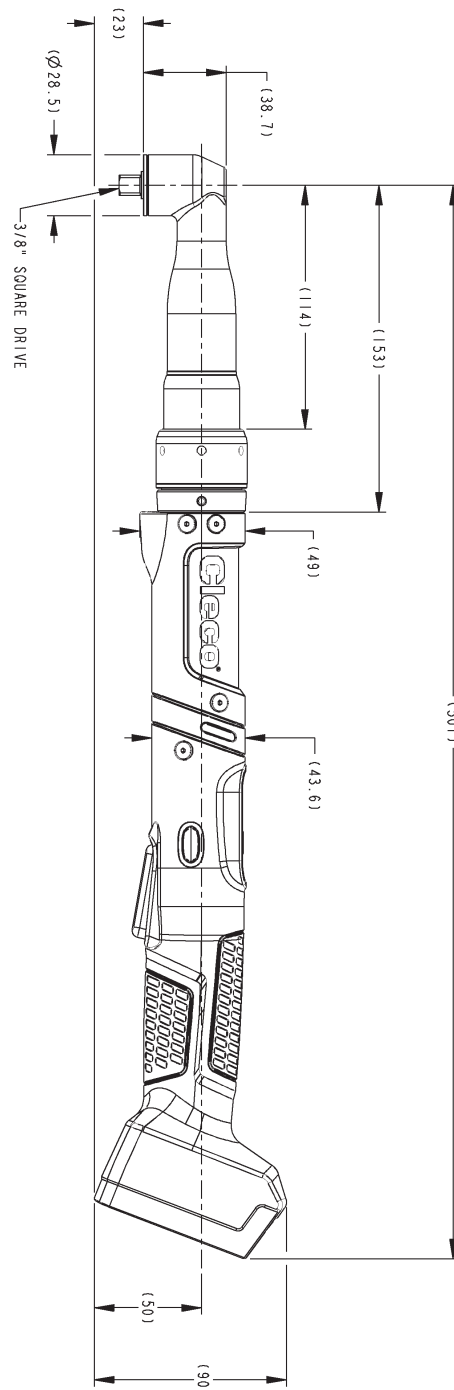

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 6.8 - 27

TORQUE RANGE (ft-lb)


Min / Max: 5.0 - 19.9

SPEED

r/min: 560

WEIGHT & DIMENSIONS

Weight w/o Battery	1.4 kg / 3.1 lb
Length	515 mm / 20.28 in
Height	38.7 mm / 1.52 in
Side to Center	14.3 mm / 0.56 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA

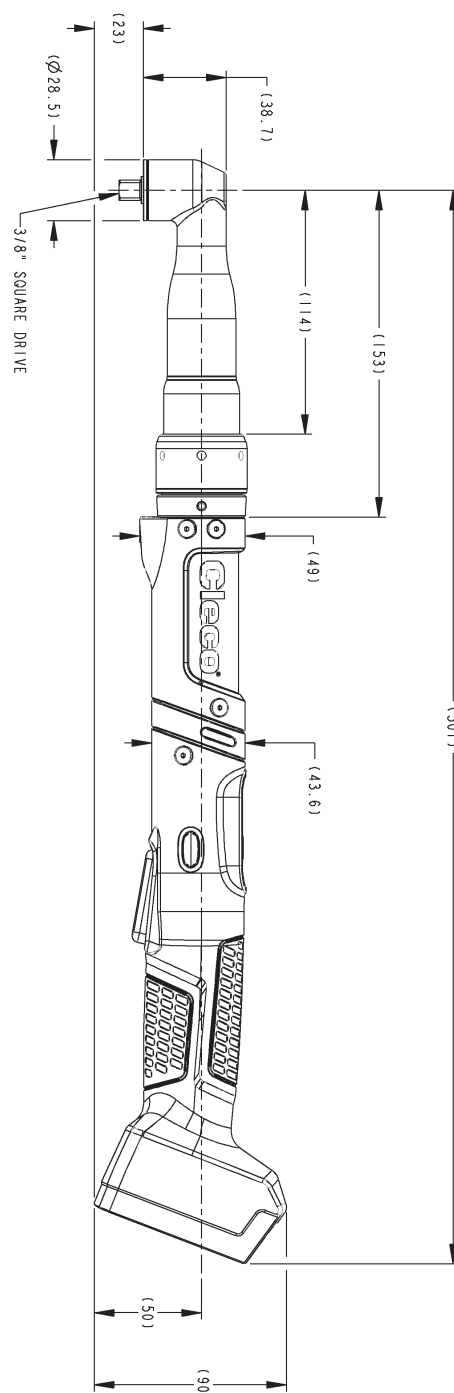

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 10 - 38

TORQUE RANGE (ft-lb)


Min / Max: 7.4 - 28.0

SPEED

r/min: 395

WEIGHT & DIMENSIONS

Weight w/o Battery	1.55 kg / 3.4 lb
Length	525 mm / 20.60 in
Height	44.5 mm / 1.75 in
Side to Center	20.6 mm / 0.65 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA

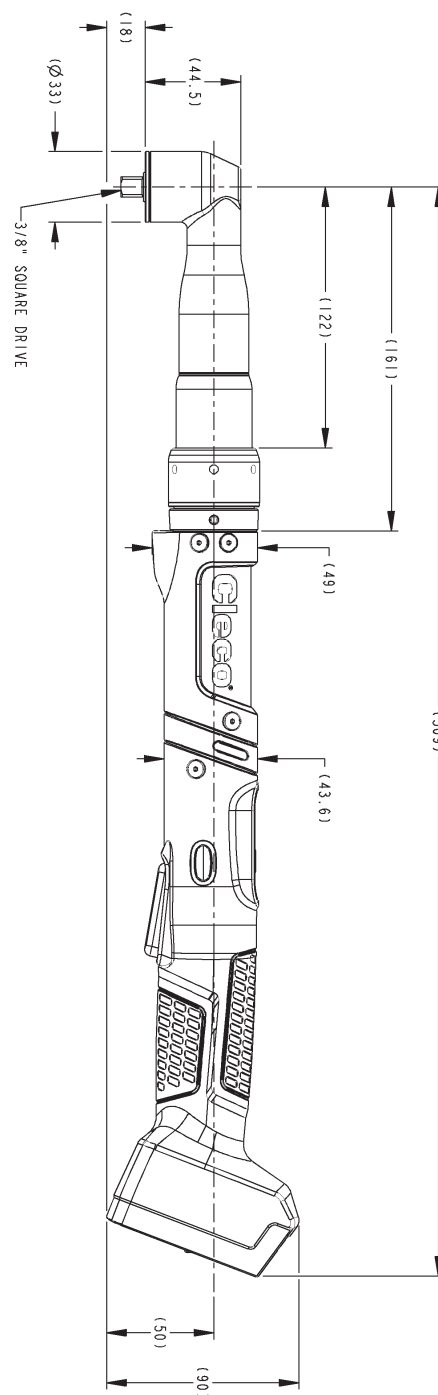

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 13 - 50

TORQUE RANGE (ft-lb)


Min / Max: 9.6 - 36.9

SPEED

r/min: 285

WEIGHT & DIMENSIONS

Weight w/o Battery	1.6 kg / 3.5 lb
Length	534 mm / 21.02 in
Height	43.8 mm / 1.72 in
Side to Center	17 mm / 0.67 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA

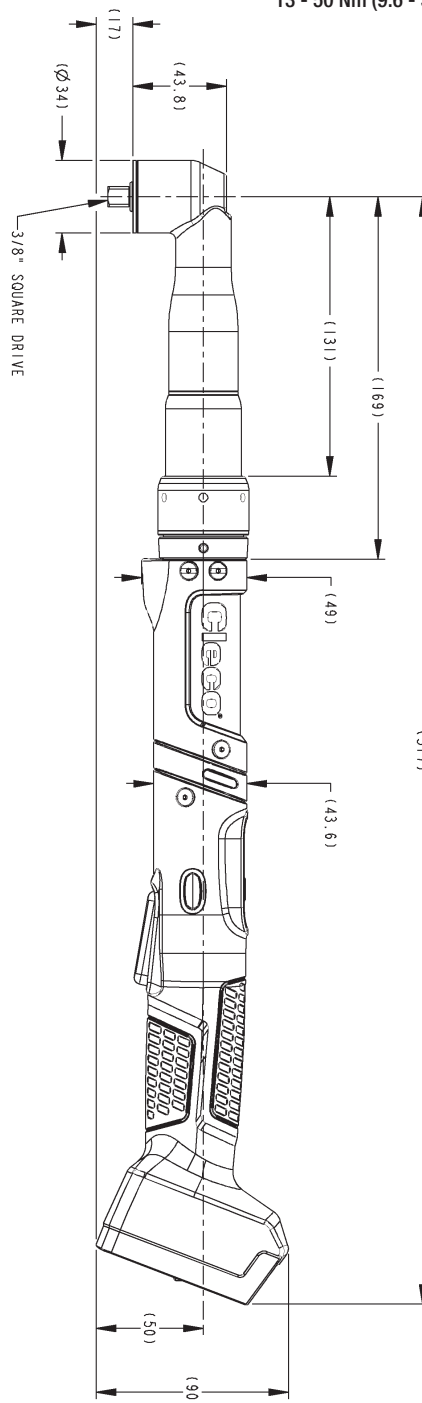

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- **Cost Savings** - Connect up to 16 tools to 1 controller
- **Flexible** - Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- **Multi-Color LED** - Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- **Compatibility** - Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- **Stay Alive Function** - Prevents reboot during battery change, gaining time and efficiency
- **Enhanced WiFi Range** - Up to 300 feet for a broad connection within your production facility
- **Decreased Takt Times** - Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 17 - 65

TORQUE RANGE (ft-lb)

Min / Max: 12.5 - 47.9

SPEED

r/min: 220

WEIGHT & DIMENSIONS

Weight w/o Battery	1.7 kg / 3.7 lb
Length	543 mm / 21.38 in
Height	46.8 mm / 1.84 in
Side to Center	19 mm / 0.75 in
Output	3/8" Square Drive
Country of Origin:	Assembled in USA

